

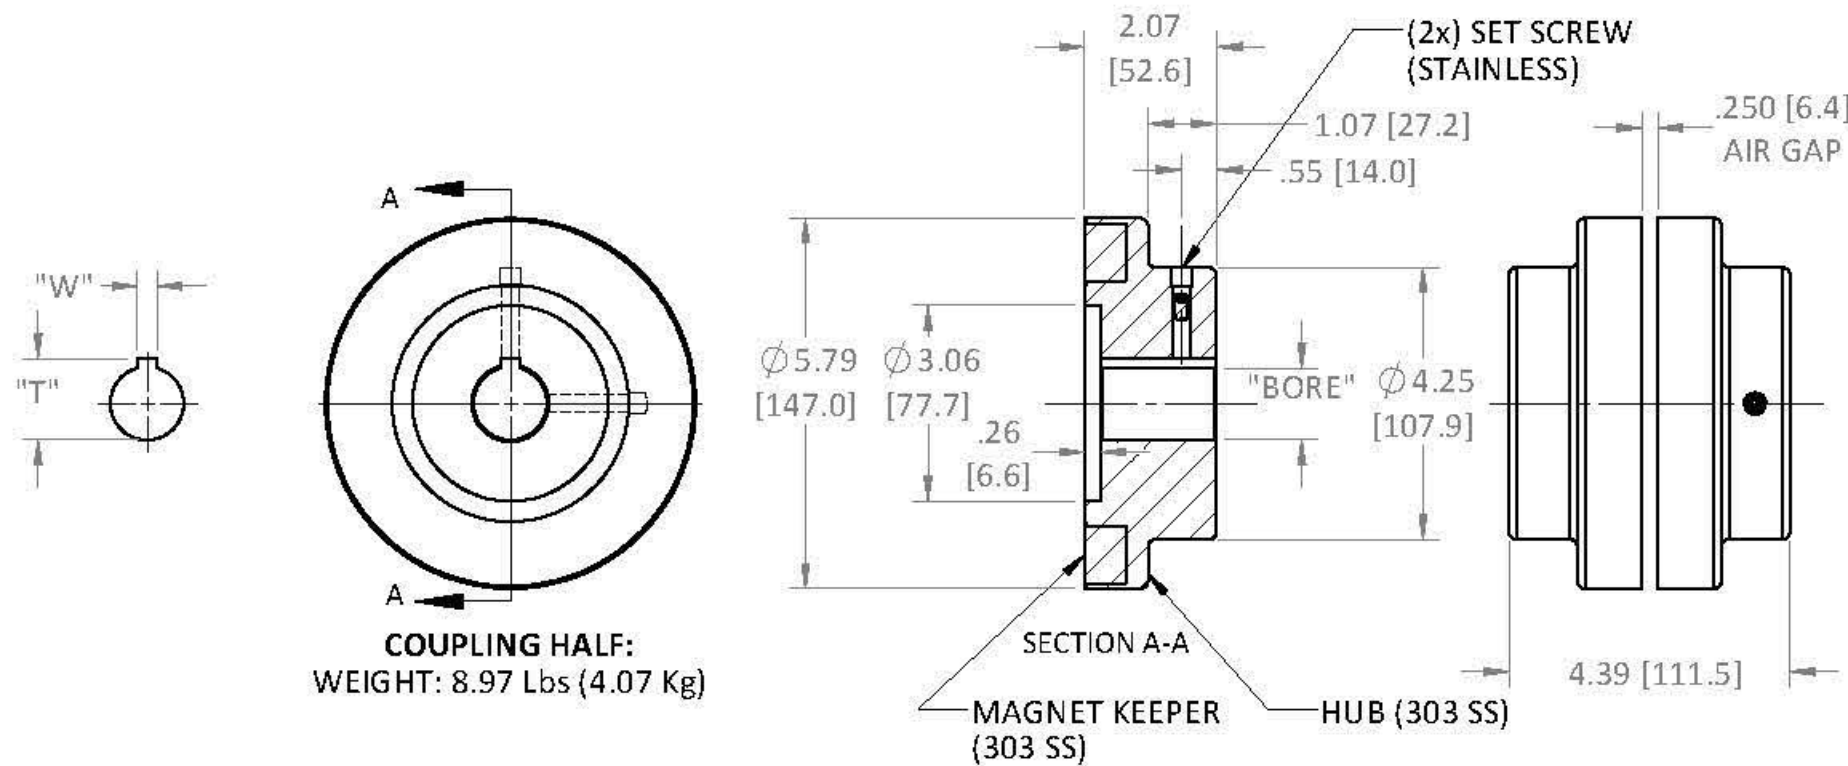


MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MDC 40	40.7 Nm	360 Lb-in	45.2 Nm	400 Lb-in	7,800

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

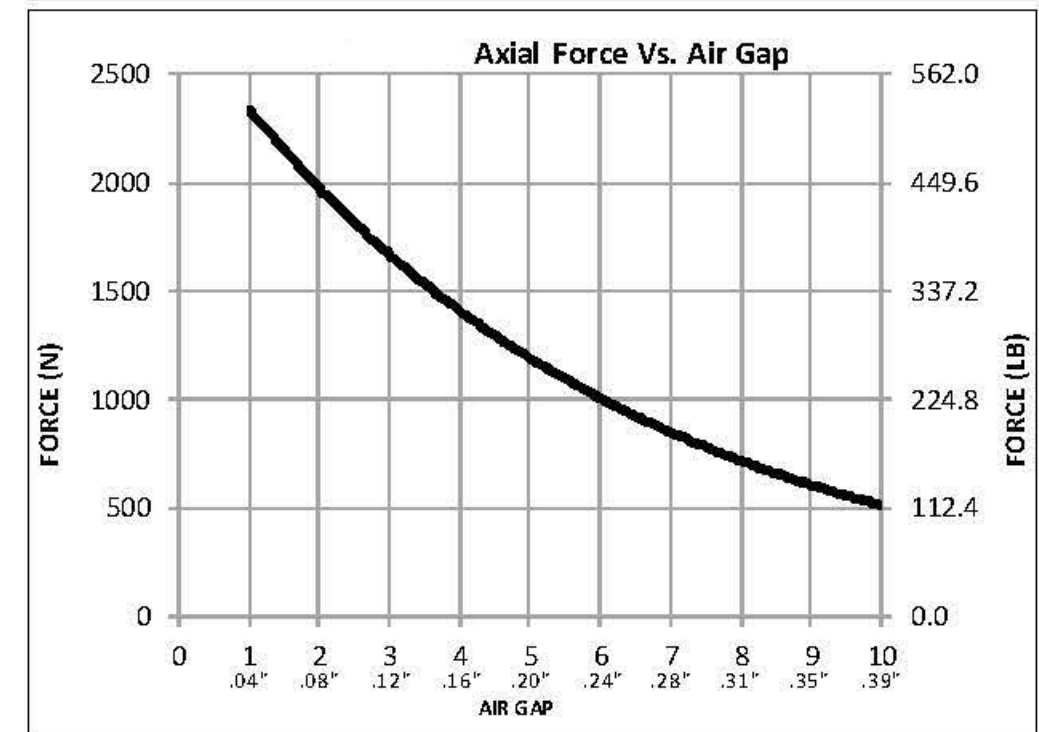

COUPLING HALF:
WEIGHT: 8.97 Lbs (4.07 Kg)

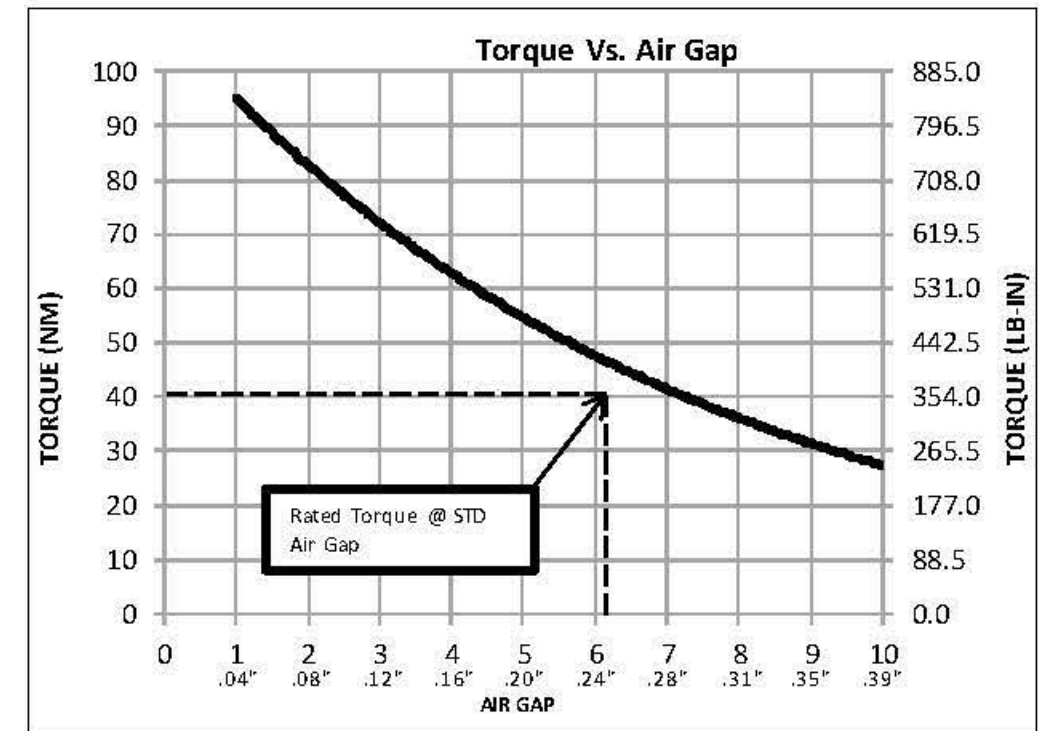

MODEL	BORE		W		T		SET SCREW, COUNTERBORE (2x) CUP POINT
	mm ^{H8}	in ^{-.001}	mm ^{+.05}	in ^{+.002}	mm ^{+.25}	in ^{+.010}	
MDC 40							
	SOLID		-		-		-
	25.40	1.000	6.35	.250	28.30	1.114	1/4-20, Ø 5/16 X .50 ▽
	29.00	1.1417	8.00	.315	32.30	1.272	M8-1.25, Ø .34 X .30 ▽
	38.00	1.4963	10.00	.3937	41.30	1.626	M10-1.50, Ø .42 X .30 ▽
	40.00	1.5750	12.00	.4724	43.30	1.705	M12-1.75, Ø .50 X .30 ▽
	50.00	2.1656	16.00	.6299	59.30	2.335	M12-1.75
	55.56	2.1875 ^{+.0015}	12.70	.500	61.30	2.414	3/8-16

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

*

FROM STOCK

USED ON	SCALE 1:2	MATERIAL SEE PRT DWG
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG
<small>ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: JX ± .01 - JXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHM.F. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES</small>		DRAWN AMD 11/11/14
		CHECKED
		DESCRIPTION Cut Sheet
		DWG. NO.
		REV.
SIZE: B		